


STARPRIM



tresor-
online



Models

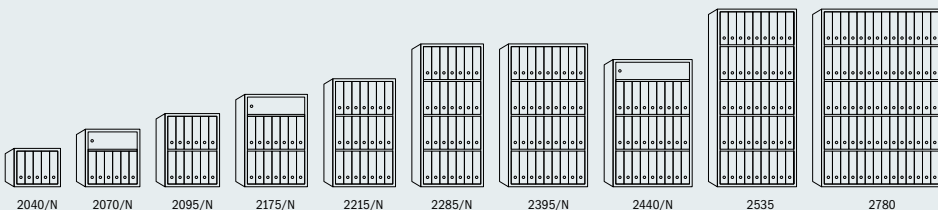

**Certified according to EN 1143-1
Security Grade II**

- ⦿ Three-way locking mechanism, with square bolts 40×10 mm, except models 2535 and 2780 – four-way locking mechanism, with solid-steel bolts with a diameter of 40 mm.
- ⦿ A continuous formed dog bar on the hinge side protects the safe in event of attack.
- ⦿ The door-frame is equipped with fire-resistant washer which protects safe interior against dust and direct irruption of flame and gases.
- ⦿ All safe models are able to be secured to a floor. Also provision for snap-off detector is installed.
- ⦿ Shelves are adjustable to every 50 mm, except models 2535 and 2780 – adjustable shelves to every 25 mm.
- ⦿ The hinges enable 205° door opening for full access.
- ⦿ Optimal File capacity. File acc. to DIN 821-D1-80 ($w_1=75$ mm).

⦿ **Measurements**

STARPRIM

MODEL	* External dimensions			Internal dimensions			Weight	Volume	Max. No. of Files
	Height [mm]	Width [mm]	Depth [mm]	Height [mm]	Width [mm]	Depth [mm]	Approx. [kg]	Approx. [liters]	
2040/N	430	460	450	334	380	305	137	39	5
2070/N	605	535	450	509	455	305	200	71	6
2095/N	790	535	450	694	455	305	247	96	12
2175/N	960	610	530	864	530	385	344	176	14
2215/N	1140	610	530	1044	530	385	397	213	21
2285/N	1495	610	530	1399	530	385	501	285	28
2395/N	1495	760	560	1399	680	415	599	395	36
2440/N	1320	760	675	1224	680	530	585	441	27
2535	1850	840	580	1720	730	415	815	521	45
**2780	1850	1190	580	1720	1080	415	1045	771	70

* - 60 mm extra depth with handle and different locks.


** - Double doors.

- Standard locking: 1 security key lock in accordance with EN 1300 – Grade A.
- Optional locks and fittings are evident from the special STARPRIM specification.



SAFE SERIES

STARPRIM

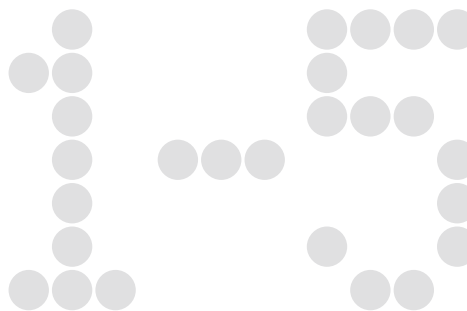

Locks

General:

Only certified locks according to EN 1300.

1. Security-key lock with 2 double-bitted keys

2. Security key lock with 2 double bitted key – changeable

The user can change the key.

3. Mechanical combination lock

With 3-wheels (1 Million possible combinations) and 4-wheels (100 Millions possible combinations); available with basic dial (3a) or spy proof button (3b).

4. Electronical combination lock

One step going-operation when opening – entering the Code.
Options: Manager mode, Silent signal alarm, Time delay, Dual combination operation etc.

5. High security electrical redundant lock system PAXOS-COMPACT – keypad input unit


One step going-operation when opening – entering the code.

Options: similar to point 4 with additional possibility of events registration and other additional functions.



6. High security electrical redundant lock system PAXOS – COMPACT – dial-knob input unit

One step going-operation when opening knob – entering the code.

Options: similar to point 4 with additional possibility of events registration and other additional functions.




Equipment



7. Provision for secure-floor installation

Floor installation screw M16 x150 mm will be used. Provision of hole for snap-off detector. STARPRIM models in Security Grade V have two anchoring holes.

7a. In case that the safe can not be secured to a floor use the opening on the back wall of the safe and secure the safe with the screw M16x150 to a wall; double door models have two openings. Anchoring into a wall is not possible for STAPRIM models in Security Grade V.



8. Alarm equipment – EMAPRIM 15

All preparations are provided for Security Grade III, IV and V for the installation of certified alarm system. Upon request the same preparation can be made also for safes of Security Grade I and II.

We offer certified anti burglary alarm system EMAPRIM 15 with the following components: acoustic detector, snap off detector, magnetic door contact, lock bolt contact, the bolt space cover/door contact distributor with cover contact and blocking elements.

9. Washer in door-frame

The complete door frame is equipped with washer, which protects the inside against gas and flame. Not valid for STARPRIM models in Security Grade V.

10. The number of shelves can be chosen by user

Shelves are adjustable.

11. Lockable compartment H=180 and 360 mm


The lockable compartment H=180 and H=360 mm can be built into the safe with screws. The compartment is equipped with cylinder lock. On the Safe with double door, also the inside compartment is equipped with two doors.

12. Left version of door


The door has the hinges on the left side.

13. Painting


The Safe is painted in structural color RAL 7035 – light grey. Upon request the Safe can be painted in different RAL colors.




Locking mechanism and Handles



Two-way locking mechanism



Three-way locking mechanism




Four-way locking mechanism



Handle for STARPRIM 1/N ALPHA SM and models 2040/N, 2070/N and 3070/N



Handle for STARPRIM 1/N BETA SM and GAMMA SM and for STARPRIM 2/N, 3/N and 4/N (except models 040/N, 070/N)



Handle for STARPRIM 5.



Specification

STARPRIM

1 2 3 4 5

SECURITY GRADE CEN		1	2	3	4	5
LOCKS	1. Mechanical key lock	⊙	⊙	⊙	⊙	⊙
	2. Mechanical key lock – changeable key	⊕ ¹	⊕ ¹	⊕	⊕	⊕
	3. Mechanical combination lock	⊕	⊕	⊕	⊙	⊙
	4. Electronical combination lock – enter pad	⊕	⊕	⊕	⊕	⊕
	5. PAXOS COMPACT – keypad	⊕ ²	⊕ ²	⊕	⊕	⊕
	6. PAXOS COMPACT – dial-knob	⊕ ²	⊕ ²	⊕	⊕	⊕
SAFE INSIDE EQUIPMENT	7. Provision for secure-floor installation	⊙	⊙	⊙	⊙	⊙
	8. Provision for alarm system	⊕ ³	⊕ ³	⊙	⊙	⊙
	9. Washer	⊙	⊙	⊙	⊙	–
	10. Shelves	⊕	⊕	⊕	⊕	⊕
	11a. Lockable compartment H=180 mm	⊕ ⁴	⊕ ⁴	⊕	⊕	⊕
	11b. Lockable compartment H=360 mm	⊕ ⁵	⊕ ⁵	⊕ ⁵	⊕ ⁵	⊕
	12. Left version	⊕	⊕	⊕	⊕	⊕
13. Variety of colour – finishes	⊕	⊕	⊕	⊕	⊕	

LEGEND:

- ⊙ Standard made
- ⊕ Upon request (add. costs)
- Not available
- ⊕¹ Not valid for models STARPRIM 1015/N, 1025/N, 1035/N and 2040/N
- ⊕² Not valid for models STARPRIM 1/N ALPHA SM and 2040/N
- ⊕³ Not valid for models STARPRIM 1/N ALPHA SM and 2040/N (except for model 1085/N)
- ⊕⁴ Not valid for models STARPRIM 1015/N, 1025/N, 1035/N and 2040/N
- ⊕⁵ Not valid for models STARPRIM smaller than models STARPRIM x095/N